

Tuesday, June 15, 2010 2:28:18 PM

Temp_Control_C600_Ethernet_EN_C0_02

Temp Control BB: HMI Report w/Sc

Temp Control

TAG REPORT

External Tags

Tag Name	Data Type	Address	Controller	Description
17_STS_NODE	16 bit Integer	B239:17	PLC-1	-
18_STS_NODE	16 bit Integer	B239:18	PLC-1	-
19_STS_NODE	16 bit Integer	B239:19	PLC-1	-
20_STS_NODE	16 bit Integer	B239:20	PLC-1	-
21_STS_NODE	16 bit Integer	B239:21	PLC-1	-
22_STS_NODE	16 bit Integer	B239:22	PLC-1	-
23_STS_NODE	16 bit Integer	B239:23	PLC-1	-
24_STS_NODE	16 bit Integer	B239:24	PLC-1	-
17_CMD_NODE_ENABL	Boolean	B240/17	PLC-1	-
18_CMD_NODE_ENABL	Boolean	B240/18	PLC-1	-
19_CMD_NODE_ENABL	Boolean	B240/19	PLC-1	-
20_CMD_NODE_ENABL	Boolean	B240/20	PLC-1	-
21_CMD_NODE_ENABL	Boolean	B240/21	PLC-1	-
22_CMD_NODE_ENABL	Boolean	B240/22	PLC-1	-
23_CMD_NODE_ENABL	Boolean	B240/23	PLC-1	-
24_CMD_NODE_ENABL	Boolean	B240/24	PLC-1	-
CMD_CURRNT_SCRN_NMBR	16 bit Integer	B240:4	PLC-1	-
CMD_TC_SCRN_MODE	Boolean	B234/16	PLC-1	-
CMD_TC_OPER_CMD_CMW	Boolean	B234/41	PLC-1	-
CMD_TC_OPER_CMD_R_S	Boolean	B234/40	PLC-1	-
CMD_TC_OPER_CMD_A_M	Boolean	B234/42	PLC-1	-
CMD_TC_OPER_SETPT	16 bit Integer	B234:5	PLC-1	-
CMD_TC_OPER_MANMV	16 bit Integer	B234:9	PLC-1	-
STS_TC_NODE_ENABLED	Boolean	B233/32	PLC-1	-
STS_TC_NODE_RSPNDING	Boolean	B233/33	PLC-1	-
STS_TC_NODE_READY	Boolean	B233/34	PLC-1	-
STS_TC_NODE_RUNNING	Boolean	B233/35	PLC-1	-
STS_TC_NODE_FAULTED	Boolean	B233/36	PLC-1	-
STS_TC_PROCVALUE	16 bit Integer	B233:4	PLC-1	-
STS_TC_STS_HOCCT1	Boolean	B233/96	PLC-1	-
STS_TC_STS_ADCNVR	Boolean	B233/98	PLC-1	-
STS_TC_STS_HHSCT1	Boolean	B233/99	PLC-1	-

STS_TC_STS_DSPRNG	Boolean	B233/101	PLC-1	-
STS_TC_STS_INPERR	Boolean	B233/102	PLC-1	-
STS_TC_STS_CTRL_H	Boolean	B233/104	PLC-1	-
STS_TC_STS_HBOCT1	Boolean	B233/106	PLC-1	-
STS_TC_STS_HBOCT2	Boolean	B233/107	PLC-1	-
STS_TC_STS_ALARM1	Boolean	B233/108	PLC-1	-
STS_TC_STS_ALARM2	Boolean	B233/109	PLC-1	-
STS_TC_STS_ALARM3	Boolean	B233/110	PLC-1	-
STS_TC_STS_SETUPA	Boolean	B233/86	PLC-1	-
STS_TC_STS_RUNSTP	Boolean	B233/88	PLC-1	-
STS_TC_STS_CMW	Boolean	B233/89	PLC-1	-
STS_TC_STS_AUTMAN	Boolean	B233/90	PLC-1	-
STS_TC_STS_HOCCT2	Boolean	B233/92	PLC-1	-
STS_TC_STS_HHSCT2	Boolean	B233/93	PLC-1	-
STS_TC_SCRN_OPER	Boolean	B233/16	PLC-1	-
STS_TC_SCRN_PROG	Boolean	B233/17	PLC-1	-
STS_TC_SETPOINT	16 bit Integer	B233:8	PLC-1	-
STS_TC_MVMONITORH	16 bit Integer	B233:12	PLC-1	-
17_STS_NODE_ENABLED	Boolean	B239/272	PLC-1	-
18_STS_NODE_ENABLED	Boolean	B239/288	PLC-1	-
19_STS_NODE_ENABLED	Boolean	B239/304	PLC-1	-
20_STS_NODE_ENABLED	Boolean	B239/320	PLC-1	-
21_STS_NODE_ENABLED	Boolean	B239/336	PLC-1	-
22_STS_NODE_ENABLED	Boolean	B239/352	PLC-1	-
23_STS_NODE_ENABLED	Boolean	B239/368	PLC-1	-
24_STS_NODE_ENABLED	Boolean	B239/384	PLC-1	-
STS_TC_STS_CTRL_C	Boolean	B233/105	PLC-1	-
STS_TC_SCRN_OPER_MAN	Boolean	B233/18	PLC-1	-
STS_TC_SCRN_OPER_AUT	Boolean	B233/19	PLC-1	-
CMD_TC_OPER_MANMV_F	Real	F232:0	PLC-1	-
STS_TC_MVMONITORH_F	Real	F232:1	PLC-1	-

No Memory Tags

Global Tags

Source Tag	System Tag	Destination Tag	Access Type
-	Current User	-	Read
-	Idle Timeout	-	Read/Write
-	Clear All Alarms Status	-	Read
-	Clear All Alarms	-	Write

-	Acknowledge All Alarms	-	Write
-	System Clock - Year	-	Read/Write
-	System Clock - Month	-	Read/Write
-	System Clock - Day	-	Read/Write
-	System Clock - Hour	-	Read/Write
-	System Clock - Minute	-	Read/Write
-	System Clock - Second	-	Read/Write
-	Screen Saver Control	-	Write
-	RAM Size	-	Read
-	Free Storage Memory	-	Read
-	Free Application Memory	-	Read
-	Short Date	-	Read
-	Long Date	-	Read
-	Current Screen Number	CMD_CURRNT_SCRN_NMBR	Read/Write
-	Language	-	Read/Write

SCREEN REPORT

Screen List Report

Name	Number	Description	Rights
Diagnostics	1001	-	-
Alarm Banner	1002	-	-
Network_Overview	31	-	-
TC_23	23	-	-
TC_24	24	-	-
TC_22	22	-	-
TC_21	21	-	-
TC_20	20	-	-
TC_19	19	-	-
TC_18	18	-	-
TC_17	17	-	-

Screen Shots

Diagnostics



Alarm Banner



Network_Overview

▲

▼

English

⏪

X

Network Overview

# 17 Disabled	900-TC # 17	900-TC # 21	# 21 Disabled
# 18 Disabled	900-TC # 18	900-TC # 22	# 22 Disabled
# 19 Disabled	900-TC # 19	900-TC # 23	# 23 Disabled
# 20 Disabled	900-TC # 20	900-TC # 24	# 24 Disabled

TC_23

900-TC #23

X

TC_24


900-TC # 24

X

TC_22


900-TC # 22

X



TC_21

900-TC # 21

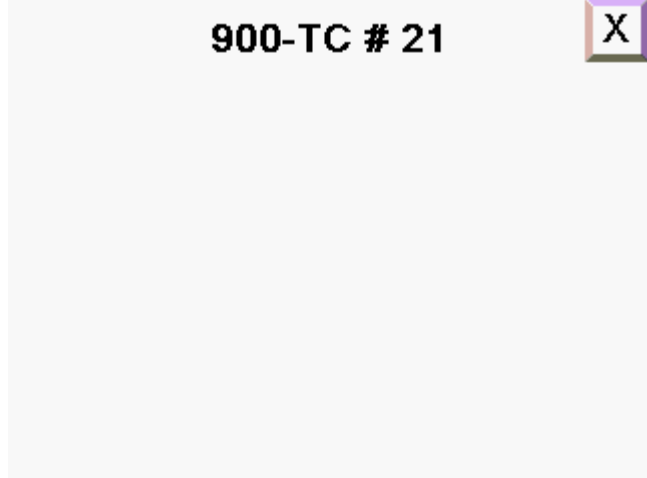

TC_20


900-TC # 20




TC_19

900-TC # 19






TC_18

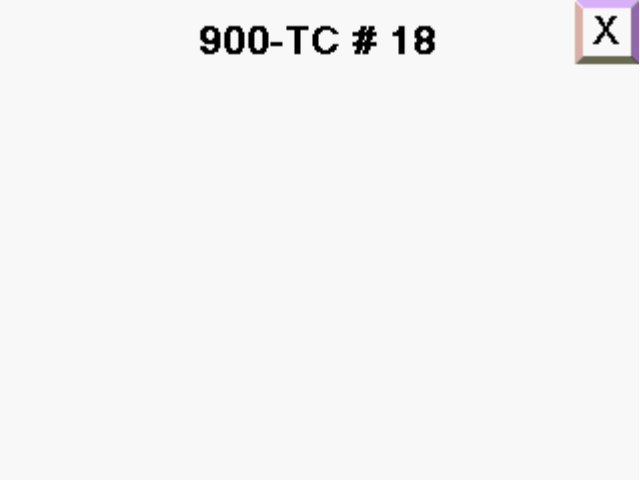

TC_17

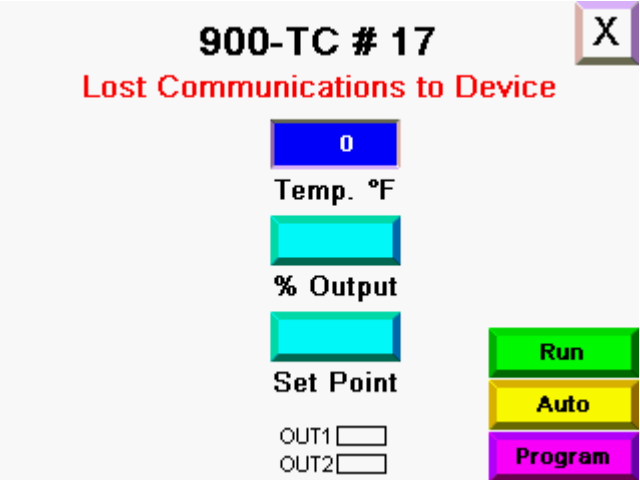

Screen Summary Report

Screen: Diagnostics Screen Color: #F8F800

Object Name	Tag		Position	Size	Touch	Accept Focus	Function Key
Text_1	-	-	(19,6)	(240,37)	N/A	N/A	N/A
Image_1	-	-	(3,4)	(5,5)	N/A	N/A	N/A
OK_Btn	-	-	(272,11)	(37,27)	True	False	F4

Screen: Alarm Banner Screen Color: #F80000

Object Name	Tag		Position	Size	Touch	Accept Focus	Function Key
Text_2	-	-	(6,4)	(308,15)	N/A	N/A	N/A
Ack	-	-	(188,25)	(38,22)	True	False	F1

Clear	-	-	(233,25)	(38,22)	True	False	F2
Close	-	-	(278,25)	(38,22)	True	False	F3

Screen: Network_Overview Screen Color: #F8F8F8							
Object Name	Tag		Position	Size	Touch	Accept Focus	Function Key
MultiStateIndicator_346	Read Tag	17_STS_NODE	(1,65)	(77,32)	N/A	N/A	N/A
PushButton_156	Write Tag	17_CMD_NODE_ENABL	(1,65)	(77,32)	True	False	-
MultiStateIndicator_490	Read Tag	18_STS_NODE	(1,98)	(77,32)	N/A	N/A	N/A
PushButton_298	Write Tag	18_CMD_NODE_ENABL	(1,98)	(77,32)	True	False	-
MultiStateIndicator_496	Read Tag	24_STS_NODE	(242,164)	(77,32)	N/A	N/A	N/A
MultiStateIndicator_495	Read Tag	23_STS_NODE	(242,131)	(77,32)	N/A	N/A	N/A
MultiStateIndicator_493	Read Tag	22_STS_NODE	(242,98)	(77,32)	N/A	N/A	N/A
MultiStateIndicator_494	Read Tag	21_STS_NODE	(242,65)	(77,32)	N/A	N/A	N/A
PushButton_302	Write Tag	24_CMD_NODE_ENABL	(242,164)	(77,32)	True	False	-
PushButton_303	Write Tag	23_CMD_NODE_ENABL	(242,131)	(77,32)	True	False	-
PushButton_301	Write Tag	22_CMD_NODE_ENABL	(242,98)	(77,32)	True	False	-
PushButton_304	Write Tag	21_CMD_NODE_ENABL	(242,65)	(77,32)	True	False	-
MultiStateIndicator_491	Read Tag	19_STS_NODE	(1,131)	(77,32)	N/A	N/A	N/A
MultiStateIndicator_492	Read Tag	20_STS_NODE	(1,164)	(77,32)	N/A	N/A	N/A
PushButton_300	Write Tag	20_CMD_NODE_ENABL	(1,164)	(77,32)	True	False	-
PushButton_299	Write Tag	19_CMD_NODE_ENABL	(1,131)	(77,32)	True	False	-
Text_134	-	-	(26,37)	(268,23)	N/A	N/A	N/A
DefaultName_58	-	-	(288,0)	(32,32)	True	False	-
Selector_1	Indicator Tag	\$SysCurrentLang	(66,0)	(60,32)	True	False	-
	Write Tag	\$SysCurrentLang					
Key_2	-	-	(33,0)	(32,32)	True	False	-
Key_3	-	-	(127,0)	(32,32)	True	False	-
Key_4	-	-	(0,0)	(32,32)	True	False	-
DefaultName_57	Visibility Tag	17_STS_NODE_ENABLED	(79,65)	(80,32)	True	False	-
DefaultName_118	Visibility Tag	18_STS_NODE_ENABLED	(79,98)	(80,32)	True	False	-
DefaultName_119	Visibility Tag	19_STS_NODE_ENABLED	(79,131)	(80,32)	True	False	-
DefaultName_120	Visibility Tag	20_STS_NODE_ENABLED	(79,164)	(80,32)	True	False	-
DefaultName_121	Visibility Tag	21_STS_NODE_ENABLED	(161,65)	(80,32)	True	False	-
DefaultName_122	Visibility Tag	22_STS_NODE_ENABLED	(161,98)	(80,32)	True	False	-
DefaultName_123	Visibility Tag	23_STS_NODE_ENABLED	(161,131)	(80,32)	True	False	-
DefaultName_124	Visibility Tag	24_STS_NODE_ENABLED	(161,164)	(80,32)	True	False	-

Screen: TC_23 Screen Color: #F8F8F8							
Object Name	Tag		Position	Size	Touch	Accept Focus	Function Key

DefaultName_116	Visibility Tag	STS_TC_SCRN_PROG	(288,0)	(32,32)	True	False	-
Text_227	-	-	(39,8)	(242,26)	N/A	N/A	N/A

Screen: TC_24 Screen Color: #F8F8F8							
Object Name	Tag		Position	Size	Touch	Accept Focus	Function Key
DefaultName_117	Visibility Tag	STS_TC_SCRN_PROG	(288,0)	(32,32)	True	False	-
Text_233	-	-	(39,8)	(242,26)	N/A	N/A	N/A

Screen: TC_22 Screen Color: #F8F8F8							
Object Name	Tag		Position	Size	Touch	Accept Focus	Function Key
DefaultName_115	Visibility Tag	STS_TC_SCRN_PROG	(288,0)	(32,32)	True	False	-
Text_221	-	-	(39,8)	(242,26)	N/A	N/A	N/A

Screen: TC_21 Screen Color: #F8F8F8							
Object Name	Tag		Position	Size	Touch	Accept Focus	Function Key
DefaultName_114	Visibility Tag	STS_TC_SCRN_PROG	(288,0)	(32,32)	True	False	-
Text_215	-	-	(40,8)	(242,26)	N/A	N/A	N/A

Screen: TC_20 Screen Color: #F8F8F8							
Object Name	Tag		Position	Size	Touch	Accept Focus	Function Key
DefaultName_113	Visibility Tag	STS_TC_SCRN_PROG	(288,0)	(32,32)	True	False	-
Text_209	-	-	(39,8)	(242,26)	N/A	N/A	N/A

Screen: TC_19 Screen Color: #F8F8F8							
Object Name	Tag		Position	Size	Touch	Accept Focus	Function Key
DefaultName_112	Visibility Tag	STS_TC_SCRN_PROG	(288,0)	(32,32)	True	False	-
Text_203	-	-	(39,8)	(242,26)	N/A	N/A	N/A

Screen: TC_18 Screen Color: #F8F8F8							
Object Name	Tag		Position	Size	Touch	Accept Focus	Function Key
DefaultName_111	Visibility Tag	STS_TC_SCRN_PROG	(288,0)	(32,32)	True	False	-
Text_197	-	-	(39,8)	(242,26)	N/A	N/A	N/A

Screen: TC_17 Screen Color: #F8F8F8							
Object Name	Tag		Position	Size	Touch	Accept Focus	Function Key
NumericDisplay_78	Read Tag	STS_TC_MVMONITORH_F	(136,107)	(65,25)	N/A	N/A	N/A
DataEntry_13	Visibility Tag	STS_TC_SCRN_OPER_MAN	(136,107)	(65,25)	True	False	-
	Indicator Tag	STS_TC_MVMONITORH_F					
	Write Tag	CMD_TC_OPER_MANMV_F					

NumericDisplay_77	Read Tag	STS_TC_SETPOINT	(136,155)	(65,25)	N/A	N/A	N/A
DataEntry_12	Visibility Tag	STS_TC_SCRN_OPER	(136,155)	(65,25)	True	False	-
	Indicator Tag	STS_TC_SETPOINT					
	Write Tag	CMD_TC_OPER_SETPT					
MultiStateIndicator_330	Read Tag	STS_TC_STS_RUNSTP	(245,163)	(75,25)	N/A	N/A	N/A
PushButton_273	Visibility Tag	STS_TC_SCRN_OPER	(245,163)	(75,25)	True	False	-
	Indicator Tag	STS_TC_STS_RUNSTP					
	Write Tag	CMD_TC_OPER_CMD_R_S					
MultiStateIndicator_329	Read Tag	STS_TC_STS_AUTMAN	(245,189)	(75,25)	N/A	N/A	N/A
PushButton_272	Visibility Tag	STS_TC_SCRN_OPER	(245,189)	(75,25)	True	False	-
	Indicator Tag	STS_TC_STS_AUTMAN					
	Write Tag	CMD_TC_OPER_CMD_A_M					
DefaultName_101	Visibility Tag	STS_TC_SCRN_PROG	(288,0)	(32,32)	True	False	-
MultiStateIndicator_321	Read Tag	STS_TC_NODE_RSPNDING	(6,33)	(309,19)	N/A	N/A	N/A
Text_185	-	-	(39,8)	(242,26)	N/A	N/A	N/A
PushButton_271	Indicator Tag	STS_TC_SCRN_OPER	(245,215)	(75,25)	True	False	-
	Write Tag	CMD_TC_SCRN_MODE					
Text_186	-	-	(135,182)	(67,16)	N/A	N/A	N/A
Text_187	-	-	(135,134)	(67,16)	N/A	N/A	N/A
NumericDisplay_79	Read Tag	STS_TC_PROCVALUE	(136,59)	(65,25)	N/A	N/A	N/A
Text_188	-	-	(136,86)	(65,16)	N/A	N/A	N/A
MultiStateIndicator_332	Read Tag	STS_TC_STS_HOCCT1	(3,105)	(129,15)	N/A	N/A	N/A
MultiStateIndicator_333	Read Tag	STS_TC_STS_ALARM2	(3,75)	(129,15)	N/A	N/A	N/A
MultiStateIndicator_334	Read Tag	STS_TC_STS_ALARM3	(3,90)	(129,15)	N/A	N/A	N/A
MultiStateIndicator_335	Read Tag	STS_TC_STS_HBOCT1	(3,120)	(129,15)	N/A	N/A	N/A
MultiStateIndicator_336	Read Tag	STS_TC_STS_HHSCT1	(3,135)	(129,15)	N/A	N/A	N/A
MultiStateIndicator_337	Read Tag	STS_TC_STS_HOCCT2	(3,150)	(129,15)	N/A	N/A	N/A
MultiStateIndicator_338	Read Tag	STS_TC_STS_HBOCT2	(3,165)	(129,15)	N/A	N/A	N/A
MultiStateIndicator_339	Read Tag	STS_TC_STS_HHSCT2	(3,180)	(129,15)	N/A	N/A	N/A
MultiStateIndicator_340	Read Tag	STS_TC_STS_ADCNVR	(3,195)	(129,15)	N/A	N/A	N/A
MultiStateIndicator_341	Read Tag	STS_TC_STS_DSPRNG	(3,210)	(129,15)	N/A	N/A	N/A
MultiStateIndicator_342	Read Tag	STS_TC_STS_INPERR	(3,225)	(129,15)	N/A	N/A	N/A
MultiStateIndicator_343	Read Tag	STS_TC_STS_ALARM1	(3,60)	(129,15)	N/A	N/A	N/A
Text_189	-	-	(141,210)	(27,15)	N/A	N/A	N/A
MultiStateIndicator_344	Read Tag	STS_TC_STS_CTRL_H	(169,212)	(25,10)	N/A	N/A	N/A
Text_190	-	-	(141,224)	(27,15)	N/A	N/A	N/A
MultiStateIndicator_345	Read Tag	STS_TC_STS_CTRL_C	(169,226)	(25,10)	N/A	N/A	N/A

COMMUNICATION REPORT

Protocol: Allen-Bradley MicroLogix/ENI
Connection Type: Ethernet
PanelView Component Settings
Optimization Method: Write last value only
Writes per Read: 10

Controller Settings

Name	Controller Type	Address	Description	Port	Request Size	Block Write Function Files
PLC-1	MicroLogix 1100	192.168.1.2	-	44818	232	False

Timing

Connection Timeout Seconds: 3
Response Timeout Milliseconds: 1000
Fail After: 3
Inter Request Delay Milliseconds: 0

Auto-Demotion

Enabled: False

Ethernet

Use DHCP?: False

LANGUAGE REPORT

Current Language Selections

Terminal Language	Designtime Language	Startup Language	Application Language:
English (United States)	English	English (United States)	English (United States)

Languages on the Terminal

Language Name	Date			Number				
	Long Date:	Short Date:	Short Date Separator:	Decimal Separator:	Thousands Separator:	Negative	Thousands Grouping:	Sample
English (United States)	Saturday, January 06, 2007	1/6/7	/	.	,	-1234	3	-123,456,789.00
Portuguese (Portugal)	Language Default	06/01/2007	-	,	.	-1234	3	-123.456.789,00
French (France)	Language Default	06/01/2007	/	,	none	-1234	3	-123456789,00
Italian (Italy)	Language Default	06/01/2007	/	,	.	-1234	3	-123.456.789,00
German (Germany)	Language Default	06/01/2007	.	,	.	-1234	3	-123.456.789,00
Spanish (Spain)	Language Default	06/01/2007	/	,	.	-1234	3	-123.456.789,00
Czech (Czech Republic)	Language Default	6/1/2007	.	,	none	-1234	3	-123456789,00
Polish (Poland)	Language Default	2007/01/06	-	,	none	-1234	3	-123456789,00

Language Name	Time	
	Time:	Time Separator:
English (United States)	1:23:00 AM	:

Portuguese (Portugal)	1:23:00 (24 Hour)	:
French (France)	01:23:00 (24 Hour)	:
Italian (Italy)	1:23:00 (24 Hour)	.
German (Germany)	01:23:00 (24 Hour)	:
Spanish (Spain)	1:23:00 (24 Hour)	:
Czech (Czech Republic)	1:23:00 (24 Hour)	:
Polish (Poland)	01:23:00 (24 Hour)	:

ALARM REPORT

No Alarms

Global Alarm Settings

Clear Alarm History on PowerOn: False

Alarm History Size (1-100): 50

SETTINGS REPORT

Design Time

Global Application Settings

Validation Filter : All

Screens Page

Default Font Size : 14

Default Screen Background : #FFFFFF

Default Font Name : Arial

Default Alignment : Center

Default Font Bold : False

Default Font Italic : False

Default Font Underline : False

Default Font Color : #FFFFFF

Run Time

Common

Set Terminal On First Load : False

Display

Brightness : -

Contrast : -

Screen saver mode : -

Screen saver timeout : -

Input Devices

Key Repeat Rate : -

Key Repeat Delay : -

RECIPE REPORT

No Recipes

SECURITY REPORT

Screen & Input Settings

Idle Time Out Length: 15 minutes

Mask Password Entry: Yes

Password & User Name Type: Alphanumeric Keypad

Design Environment Secured: False

Security Rights

User	Password Modifiable	Rights
		DESIGN
All Users*	False	True